IMPACT RESISTANCE GLOVES


IMPACT RESISTANCE GLOVES SERIES



MATERIAL IMPACT RESISTANCE COMPARISON & SPECIFICATIONS

(ANSI/ISEA 138 & EN 13594 Standards)

Material Type	ANSI Impact Level	EU Impact Level	Key Features	Recommended Applications
Foam Latex	A1	Level P	Lightweight cushioning layer, soft and ergonomic fit for daily low-impact tasks.	Logistics, light assembly
Sewing TPR	A1-A3	Level P	Stitched TPR strips for targeted impact resistance (e.g., knuckles), ideal for heavy-duty work.	Construction, machinery repair
Glue TPR	A1-A2	Level P	Seamless bonding ensures durability and flexibility, perfect for repetitive tasks.	Automotive, metalworking
Thermal Silicone	A1-A2	Level P	Heat-resistant silicone (-40℃ to 200℃) provides protection against both impacts and extreme temperatures.	High-temperature workshops, cold storage



TX1000

18 GAUGE



APPLICATION

Construction · Mining · Warehouse logistics · Automotive · Mechanical assembly · Metal fabrication

DESCRIPTION

- Ultra-light design 18 gauge liner offers excellent flexibility.
- Silicone rubber on back provides impact resistance and can be used in both cool and warm conditions.
- Foam nitrile coating offers excellent grip and abrasion resistance.
- Impact resistance meets the EN388:2016+A1:2018 standard test.

GAUGE	18 gauge
LINER MATERIAL	Adamas
COATING MATERIAL/FINISH	Nitrile foam
CONSTRUCTION OF TPR	Glued with silicone rubber
SIZE	7/S -11/XXL

CE Cat II · UK CA

EN388 4X42CP (Abrasion Resistance · Cut Resistance · Tear Resistance · Puncture Resistance · ISO Cut Level · Impact Resistance) · ANSI CUT A3 · ANSI ISEA 138 1



IMPACT PROTECTION

TX1030

15 GAUGE



APPLICATION

Construction · Mining · Warehouse logistics · Automotive · Mechanical assembly · Metal fabrication

DESCRIPTION

- The fully double-dipped design provides 360 degree hand protection against water and oil environment.
- The sandy nitrile coating offers excellent grip and abrasion resistance in wet conditions.
- The product's impact resistance complies with EN388:2016+A1:2018 and ANSI/ISEA 138 standards.

GAUGE	15 gauge
LINER MATERIAL	Polyester
COATING MATERIAL/FINISH	Nitrile fully coated, Sandy finish
CONSTRUCTION OF TPR	Glued with PVC rubber
SIZE	7/S -11/XXL

CE Cat II · UK CA · EN407 X1XXXX

EN388 4121XP (Abrasion Resistance · Cut Resistance · Tear Resistance · Puncture Resistance · ISO Cut Level · Impact Resistance) · ANSI ISEA 138 1



IMPACT PROTECTION

TX1050



APPLICATION

Construction · Mining · Warehouse logistics · Automotive · Mechanical assembly · Metal fabrication

DESCRIPTION

- The fully coating provides 360 degree hand protection against water and oil environment.
- Advanced NBR technology ensures superior abrasion resistance and long-lasting durability.
- The product's impact resistance complies with EN388:2016+A1:2018 and ANSI/ISEA 138 standards.

LINER MATERIAL	Cotton Jersey
COATING MATERIAL/FINISH	Nitrile smooth
CONSTRUCTION OF TPR	Glued with PVC rubber
SIZE	9/L -11/XXL

CE Cat II · UK CA · EN407 X1XXXX

EN388 4121XP (Abrasion Resistance · Cut Resistance · Tear Resistance · Puncture Resistance · ISO Cut Level · Impact Resistance) · ANSI ISEA 138 1



IMPACT PROTECTION

TX2000

13 GAUGE



DESCRIPTION

- PVC rubber sewn on back provides impact resistance with great firmness.
- Nitrile foam coating offers great grip and abrasion resistance in wet condition.
- Impact resistance complies with EN388:2016+A1:2018 standard test.

GAUGE	13 gauge
LINER MATERIAL	HPPE,Spandex,Nylon,Glass fiber
COATING MATERIAL/FINISH	Nitrile foam
CONSTRUCTION OF TPR	Sewn with PVC ruber
SIZE	7/S -11/XXL

CE Cat II UKCA EN407 X1XXXX

EN388 4X42CP — Abrasion Resistance, Cut Resistance, Tear Resistance, Puncture Resistance, ISO Cut Level, Impact Resistance

ANSI CUT A3

ANSI ISEA 138 2



IMPACT PROTECTION

APPLICATION

Construction, Mining, Warehouse logistics, Automotive, Mechanical assembly, Metal fabrication

TX8020

15 GAUGE



DESCRIPTION

- 15 gauge seamless knitted nylon and spandex liner offers excellent comfort and flexibility.
- Sandy nitrile coating provides great abrasion resistance and sensitivity for handing precise parts.
- Optional choice on single dipped nitrile sandy, offers great breathability and flexibility.
- Impact resistance performance complies with EN388:2016+A1:2018 and ANSI/ISEA 138 level 1 standards.

GAUGE	15 gauge
LINER MATERIAL	Nylon,Spandex
COATING MATERIAL/FINISH	Nitrile sandy
CONSTRUCTION OF TPR	Sewn with PVC rubber
SIZE	7/S -11/XXL

CE Cat II UKCA EN407 X1XXXX

EN388 4131XP — Abrasion Resistance, Cut Resistance, Tear Resistance, Puncture Resistance, ISO Cut Level, Impact Resistance

ANSI ISEA 138 1



IMPACT PROTECTION

APPLICATION

Construction, Mining, Warehouse logistics, Automotive, Mechanical assembly, Metal fabrication

TX3000

15 GAUGE



DESCRIPTION

- Ultra-light design 15 gauge liner offers excellent flexibility.
- PVC rubber sewn on back provides impact resistance with great firmness.
- Foam nitrile coating offers great grip and breathability.
- Impact resistance complies with EN388:2016+A1:2018 standard test.



GAUGE	15 gauge
LINER MATERIAL	Adamas,Polyester,Spandex
COATING MATERIAL/FINISH	Nitrile foam
CONSTRUCTION OF TPR	Sewn with PVC rubber
SIZE	7/S -11/XXL

CE Cat II UKCA EN407 X1XXXX

EN388 4X42DP — Abrasion Resistance, Cut Resistance, Tear Resistance, Puncture Resistance, ISO Cut Level, Impact Resistance

ANSI CUT A4

ANSI ISEA 138 2



IMPACT PROTECTION

APPLICATION

Construction, Mining, Warehouse logistics, Automotive, Mechanical assembly, Metal fabrication

TX9050

18 GAUGE



DESCRIPTION

- Patent Adamas® technology gloves supply stable and excellent anti-cut performance even after long time use and several times wash and dry.
- Ultra-thin liner without any metal materials is more comfortable than normal HPPE fiber and no risk of skin allergy.
- Sandy nitrile coating offers excellent grip and abrasion resistance in wet conditions.
- Impact resistance performance complies with EN388:2016+A1:2018 and ANSI/ISEA 138 level 1 standards.

GAUGE	18 gauge
LINER MATERIAL	ADAMAS
COATING MATERIAL/FINISH	Nitrile sandy
CONSTRUCTION OF TPR	Sewn with PVC ruber
SIZE	7/S -11/XXL

CE Cat II UKCA EN407 X1XXXX

EN388 4X42DP — Abrasion Resistance, Cut Resistance, Tear Resistance, Puncture Resistance, ISO Cut Level, Impact Resistance

ANSI CUT A4

ANSI ISEA 138 1



IMPACT PROTECTION

APPLICATION

Construction, Mining, Warehouse logistics, Automotive, Mechanical assembly, Metal fabrication

TX5000

13 GAUGE



DESCRIPTION

- 13 gauge design for heavy duty work condition.
- PVC rubber sewn on back provides impact resistance with great firmness.
- Sandy nitrile coating offers great grip and abrasion resistance in wet condition.
- Impact resistance complies with EN388:2016+A1:2018 standard test.

GAUGE	13 gauge
LINER MATERIAL	HPPE,Spandex,Nylon,Glass fiber
COATING MATERIAL/FINISH	Nitrile sandy
CONSTRUCTION OF TPR	Sewn with PVC rubber
SIZE	7/S -11/XXL

CE Cat II UKCA EN407 X1XXXX

EN388 4X42CP — Abrasion Resistance, Cut Resistance, Tear Resistance, Puncture Resistance, ISO Cut Level, Impact Resistance

ANSI CUT A3

ANSI ISEA 138 1



IMPACT PROTECTION

APPLICATION

Construction, Mining, Warehouse logistics, Automotive, Mechanical assembly, Metal fabrication

T5000

13 GAUGE



DESCRIPTION

- The glove offers cut resistance and high level impact protection.
- The patent latex bumper provides a soft and comforable feeling.
- CE certified impact glove complies with EN388:2016+A1:2018 standard.
- ECO-latex technology coating offers great grip and excellent durability.

GAUGE	13 gauge
LINER MATERIAL	HPPE,Spandex,Nylon,Glass fiber
COATING MATERIAL/FINISH	ECO-latex
SIZE	8/M-11/XXL

CE Cat II UKCA EN407 X2XXXX

EN388 3X43CP — Abrasion Resistance, Cut Resistance, Tear Resistance, Puncture Resistance, ISO Cut Level, Impact Resistance

ANSI CUT A3

ANSI ISEA 138 1



IMPACT PROTECTION

APPLICATION

Construction, Mining, Warehouse logistics, Automotive, Mechanical assembly, Metal fabrication

N9110

15 GAUGE



DESCRIPTION

- Sandy nitrile coating provides excellent grip in both dry and oil environment.
- CE-certified impact-resistant gloves comply with EN388:2016+A1:2018 standard.
- Available in multiple color options for impact protection bumper.

GAUGE	15 gauge
LINER MATERIAL	Adamas,Spandex,Nylon
COATING MATERIAL/FINISH	Nitrile Sandy,ECO-latex
SIZE	8/M-11/XXL

CE Cat II UKCA EN407 X1XXXX



- IMPACT PROTECTION

APPLICATION



N9300

15 GAUGE



DESCRIPTION

- 15 guage polyester liner offers great flexibility and dexterity.
- Ideal choice for handling construction material.
- Sandy nitrile coating ensures excellent dry grip on slippery objects.

GAUGE	15 gauge
LINER MATERIAL	Polyester
COATING MATERIAL/FINISH	Nitrile sandy,ECO-latex
SIZE	8/M-11/XXL

CE Cat II UKCA EN407 X1XXXX



- IMPACT PROTECTION

APPLICATION



L9500

7 GAUGE



DESCRIPTION

- Impact-resistant design with latex dots ensures good grip in dry environment.
- Ideal choice for light-duty material handling applications.

GAUGE	7 gauge
LINER MATERIAL	Polycotton
COATING MATERIAL/FINISH	ECO-latex
SIZE	8/M-11/XXL

CE Cat II UKCA





- IMPACT PROTECTION

APPLICATION



Technology


Impact Resistance

Impacts come in all forms, shapes, and magnitudes for workers. Whether caused by falling tools, equipment or pinches, impact injuries have one thing in common: unpredictability. Individuals must always be prepared and protected from impact and pinch points.

Tested and updated under the ISEA 138 impact protection guidelines, our impact-resistant technology is designed to absorb and redistribute the energy away from the hand and finger bones during an impact. XINGYU constantly evaluates our impact protection for effectiveness to ensure the optimal durometer and height for impact dissipation.

As a manufacturer dedicated to safety glove innovation, we validate impact resistance through globally recognized standards. Equipped with professional impact-testing facilities, our factory rigorously adheres to both ANSI Impact Level (US) and EU Impact Level certification protocols, accurately replicating



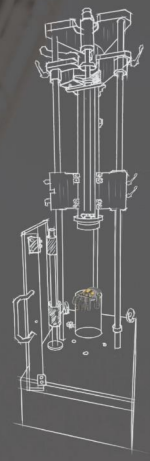

Impact Protection

Back-of-hand bones and soft tissues are extremely vulnerable to impact-related hand injuries among a wide range of job sites. This U.S.-based impact performance standard will help safety professionals make better-informed decisions about glove selection-ultimately keeping more people safe on the job.

Impact protection: ANSI/ISEA 138

The ISEA 138 standard establishes the minimum performance, classification, and labeling requirements for gloves that are designed to protect the knuckles and fingers from impacts based on three performance levels. ISEA 138 requires testing in a lab that meets the laboratory conformity assessment standard I0S/IEC 17205. Strict guidelines for the testing device, including weight and velocity specifications for the anvil, must be followed and measured consistently to help increase the credibility of glove performance level claims.

How the test works: To score gloves into their appropriate level, impact protection testing under ISEA 138 requires consistent, regulated tests on each kind of glove on two areas for impact performance: knuckles and fingers/thumb. On both gloves, knuckles are tested four times and fingers/thumb are tested five times.

To start, one pair of gloves is required per test. The gloves are cut in half and the back-of-hand (where the impact protection is located) is placed on an anvil. A striker with a force of 5 Joules is dropped on the required back-of-hand locations, and the amount of force transferred through the glove back-of-hand is recorded with a force gauge that is connected below the anvil and measured in kiloNewtons (kN).

Scoring: The average of eight knuckle tests are compared to the average of the ten finger tests. The highest average of the two is the impact testing score.

- **Performance Level 1:**
  Results in an average peak transmitted force of greater than or equal to 9 kN. 55% of force absorbed.
- **Performance Level 2:**
  Results in an average peak transmitted force of 6.5 to 8.1 kN. 67.5% of force absorbed.
- **Performance Level 3:**
  Results in an average peak transmitted force of 4 to 5 kN. 80% of force absorbed.

Impact protection: EN 388

The impact resistance test (Impact Protection) under the EN 388 standard serves as the core performance evaluation system for industrial gloves in the European market, focusing on the protective capabilities of the knuckle area on the back of the hand. The test uses a vertical drop hammer impact device to deliver controlled energy precisely to the glove's critical protective zones, with strict pass/fail criteria: Average transmitted force ≤ 7 kN (kilonewtons), and No single impact result > 9 kN to achieve certification.



ANSI/ISEA 138
impact standards
knuckle and fingers

18 Tests lowest outcome = final score

EN388
impact standards
knuckle only

4 all 4 tests on different gloves,average outcome = final score

CUT RESISTANCE GLOVES

CUT RESISTANCE GLOVES SERIES



MULTI-LEVEL CUT PROTECTION GLOVES

TIERED PROTECTION SYSTEM CERTIFIED BY ANSI & ISO

BASE MATERIAL:
HPPE + Nylon + Spandex (All Models)

ESSENTIAL PROTECTION:
ANSI A2 | ISO 13997 B
▶ Light-Duty: Packaging, light material handling.

INDUSTRIAL GRADE:
Fiberglass reinforcement-**ANSI A3-A4 | ISO 13997 C-D**
▶ Medium-Duty: Metal stamping, glass processing.

HEAVY-DUTY SHIELD:
Stainless steel fibers-**ANSI A5-A9 | ISO 13997 E-F**
▶ High-Risk: Sheet metal fabrication, machinery maintenance.

GLASS FIBER+

STEEL+

T2000

13 GAUGE



APPLICATION



DESCRIPTION

- Excellent grip and cut resistance performance.
- Eco-latex can integrate with HPPE liner strictly to offer best durability performance.
- Customized pattern designed available.
- Great tear and puncture resistance protection.

GAUGE	13 gauge
LINER MATERIAL	HPPE,Spandex,Nylon,Glass fiber
COATING MATERIAL/FINISH	Eco-latex
SIZE	7/S -11/XXL



M1000

15 GAUGE



APPLICATION



DESCRIPTION

- High level of cut performance EN ISO level C.
- 15 gauge HPPE liner provides excellent dexterity and flexibility.
- Nitrile crotch reinforcement to enhance the durability.
- Advanced nitrile micro-foam coating offers the great abrasion and ultra-thin coating provides the great breathability.

GAUGE	15 gauge
LINER MATERIAL	HPPE,Spandex,Nylon,Glass fiber
COATING MATERIAL/FINISH	Nitrile microfine foam
SIZE	7/S -11/XXL





REINFORCED THUMB CROTCH

H3101D

13 GAUGE



APPLICATION



DESCRIPTION

- High level of Cut performance EN ISO level D.
- Breathable PU smooth coating and lightweight liner allow high level comfort and dexterity,keeping hands cool and dry.
- Great grip performance in dry working condition.
- Excellent abrasion performance and durability in use.

GAUGE	13 gauge
LINER MATERIAL	HPPE,Spandex,Nylon,Steel
COATING MATERIAL/FINISH	Polyurethane smooth
SIZE	7/S -11/XXL





H2000

13 GAUGE




DESCRIPTION

- High level of Cut performance EN ISO level E.
- Breathable nitrile foam coating and liner allow high level comfort and dexterity,keeping hand cool and dry.
- Great grip performance in dry and slightly oil working condition.
- Excellent abrasion performance and durability.

GAUGE	13 gauge
LINER MATERIAL	HPPE,Spandex,Nylon,Glass fiber,Steel
COATING MATERIAL/FINISH	Nitrile foam
SIZE	7/S -11/XXL

CE Cat II UKCA EN407 X1XXXX OEKO-TEX STANDARD 100 TÜV SÜD





APPLICATION

Glass manufacturing · Steel industry · Automotive · Maintenance · Construction · Mechanical assembly

H7000

18 GAUGE



DESCRIPTION

- Ultra-light weight liner offers Cut performance EN ISO13997 level D.
- Breathable nitrile foam coating and lightweight liner allow high level comfort and dexterity,keeping hands safe and dry.
- Great grip performance in dry working condition.

GAUGE	18 gauge
LINER MATERIAL	HPPE,Spandex,Nylon,Glass fiber,Steel
COATING MATERIAL/FINISH	Nitrile foam
SIZE	7/S -11/XXL

CE Cat II UKCA OEKO-TEX STANDARD 100 TÜV SÜD



APPLICATION

Glass manufacturing · Steel industry · Automotive · Maintenance · Construction · Mechanical assembly

H5000E

13 GAUGE



DESCRIPTION

- High level of Cut performance EN ISO level E.
- Nitrile Sandy rough coating provides excellent grip performance in dry and oil working condition.
- Breathable liner allow high level comfort and dexterity.
- Excellent abrasion performance and durability.



GAUGE	13 gauge
LINER MATERIAL	HPPE,Spandex,Nylon,Glass fiber,Steel
COATING MATERIAL/FINISH	Nitrile sandy
SIZE	7/S -11/XXL

CE Cat II UKCA EN407 X1XXXX OEKO-TEX STANDARD 100 TÜV SÜD





APPLICATION

Glass manufacturing · Steel industry · Automotive · Maintenance · Construction · Mechanical assembly

H9000

21 GAUGE



DESCRIPTION

- High cut performace for EN ISO13997 and ANSI.
- Nitrile sandy coating provides excellent grip performance in dry and oil working condition.
- Excellent abrasion performance and durability.
- Nitrile crotch reinforcement to enhance safety and durability.

GAUGE	21 gauge
LINER MATERIAL	HPPE,Tungsten,Polyester,Spandex
COATING MATERIAL/FINISH	Sandy nitrile
SIZE	7/S -11/XXL

CE Cat II UKCA EN407 X1XXXX OEKO-TEX STANDARD 100





- REINFORCED THUMB CROTCH

APPLICATION

Glass manufacturing · Steel industry · Automotive · Maintenance · Construction · Mechanical assembly

H5101D

13 GAUGE



DESCRIPTION

- Nitrile smooth fully coating ,sandy finish in 13 guage seamless liner.
- Excellent grip performance in dry and oil working condition.
- Fully coated design to provide better protection on hands.
- Excellent abrasion performance and durability.

GAUGE	13 gauge
LINER MATERIAL	Stable HPPE, Polyester, Spandex, Steel
COATING MATERIAL/FINISH	Nitrile sandy
SIZE	7/S -11/XXL

CE Cat II UKCA EN407 X1XXXX OEKO-TEX STANDARD 100





APPLICATION

Glass manufacturing · Steel industry · Automotive · Maintenance · Construction · Mechanical assembly

K5101

10 GAUGE



DESCRIPTION

- Designed for high cut level protection and heat contact protection less than 350℃.
- Composite material mixed in liner provides great comfort and flexibility.
- Excellent abrasion performance and durability.
- Stronger coating provides the great performance against abrasion,tear and puncture.
- Good heat contact resistance for hot parts handling.

GAUGE	10 gauge
LINER MATERIAL	Aramid,Spandex,Steel,Nylon,Cotton
COATING MATERIAL/FINISH	Latex crinkle
SIZE	8/M -11/XXL

CE Cat II UKCA EN407 X2XXXX OEKO-TEX STANDARD 100



APPLICATION

Glass manufacturing · Steel industry · Automotive · Maintenance · Construction · Mechanical assembly



T3001



N+ Alternative Pattern

OEM/ODM service to customize exclusive pattern



More options for choice

OEKO TEX® STANDARD 100

EN407 X2XXXX

28% ↑ Fits improved

Ergonomic design of crotch to fit well

260% ↑ Durability improved

Patent Eco-latex formulation design

TECHNOLOGY

Palm pattern was made by physical pressure, customized pattern optional. Keep the original rubber characteristic, offer more than 260% durability performance improved and 200% EN abrasion cycles improved than latex crinkle or foam gloves.

Chemical solvent free in production process (No crinkle oil/acetic acid/methyl alcohol), eco-friendly for workers hand, Oeko-Tex certificated.

Patent curve design of hand former to fix the shape which provide excellent fit&feeling, reduce the fatigue during long time working.

Patent No. ZL201310536861.7

T1000

13 GAUGE




DESCRIPTION

- Polyester and spandex knitted liner to provide great flexibility and comfort.
- Eco-Latex technology coating offers outstanding durability performance.
- Customized palm pattern available.

GAUGE	13 gauge
LINER MATERIAL	Polyester，spandex
COATING MATERIAL/FINISH	ECO-latex
SIZE	7/S -11/XXL

CE Cat II UKCA EN407 X2XXXX OEKO-TEX STANDARD 100





APPLICATION



L2001

13 GAUGE



DESCRIPTION

- 13 gauge seamless knitted liner provides excellent comfort.
- Optional choice for single-dipped latex sandy to have better dexterity and breathability.
- Ideal to use in small part handling.

GAUGE	13 gauge
LINER MATERIAL	Polyester
COATING MATERIAL/FINISH	Latex sandy
SIZE	7/S -11/XXL

CE Cat II UKCA FSC



APPLICATION



L1101

10 GAUGE



DESCRIPTION

- The crinkle latex finish provides excellent grip in dry and wet conditions.
- Good dexterity and flexibility in medium heavy duty work.
- Better tear and puncture resistance.


GAUGE	10 gauge
LINER MATERIAL	100% Polyester
COATING MATERIAL/FINISH	Latex crinkle
SIZE	7/S -11/XXL

CE Cat II UKCA EN407 X2XXXX





L1201
EN388
2121X



APPLICATION



L2005

15 GAUGE



DESCRIPTION

- Fully latex coating offers better protection against water penetration.
- Excellent liquid resistance and good grip in water working condition.
- 15 gauge seamless knitted liner provides great comfort and flexibility.

GAUGE	15 gauge
LINER MATERIAL	Nylon
COATING MATERIAL/FINISH	Latex smooth fully coated, Sandy thumb coated
SIZE	7/S -11/XXL

CE Cat II UKCA FSC





L2002
EN388
2131X

APPLICATION



L1601

13 GAUGE




DESCRIPTION

- High cost-effective choice for general purpose work.
- The crinkle latex finish provides excellent grip in dry and wet condition.
- Good dexterity and flexibility in medium heavy duty work.
- Good tear and puncture resistance.


GAUGE	13 gauge
LINER MATERIAL	Polyester
COATING MATERIAL/FINISH	Latex crinkle
SIZE	7/S -11/XXL

CE Cat II UKCA EN407 X1XXXX





L1603
EN388
2131X



APPLICATION



L2601

13 GAUGE




DESCRIPTION

- Latex foam provides great breathability and comfort.
- High flexible polyester and latex foam coating offer excellent flexibility to reduce fatigue.
- Good abrasion and tear resistance.

GAUGE	13 gauge
LINER MATERIAL	Polyester
COATING MATERIAL/FINISH	Latex foam
SIZE	7/S -11/XXL

CE Cat II UKCA FSC



APPLICATION





NEW PRODUCT



Coating Technology - The New Standard for Work Gloves

3x Longer Lasting: Our upgraded nitrile blend makes gloves 3x more durable than regular nitrile gloves. Fewer replacements mean lower costs.

Super Soft & Flexible: Unique air-cushion design makes gloves 20% softer while keeping their strength. Ideal for high-precision operations and delicate handling scenarios.

Sustainable Production: Revolutionary water-saving system uses 60% less water and chemicals. Cleans and reuses water in production. Certified safe for people and the planet (REACH/OEKO-TEX®/TÜV carbon neutral certified).

Anti-Slip Texture: Smart palm texture stays grippy even with oil. Special oil-proof nitrile material protects hands in garages, factories, and other industrial jobs.

Used and trusted by workers in:

✔Car repair ✔Electronics ✔Heavy machinery

ND6501



NEW PRODUCT



DESCRIPTION

- The 15G seamless knitted nylon liner offers excellent comfort and flexibility.
- Supplies coating material supplies safe performance for food contact.
- Advanced foam producing technology offers great breathability、flexibility and durability.

GAUGE	15 gauge	
LINER MATERIAL	Nylon, Spandex	
COATING MATERIAL/FINISH	Nitrile	foam
SIZE	7/S -11/XXL	

CE Cat II UK CA EN407 X1XXXX OEKO TEX STANDARD 100 TÜV SÜD



APPLICATION



NO1000

15 GAUGE



DESCRIPTION

- Special technology without using chemical auxiliary materials during production to keep healthy and environment friendly.
- Advanced coating material supplies best performance for oil resistance,
- Embossed coating surface makes good anti-slip

GAUGE	15 gauge
LINER MATERIAL	Polyester
COATING MATERIAL/FINISH	Advanced nitrile
SIZE	7/S-11/XXL

Cat II · EN407 X1XXXX · OEKO-TEX STANDARD 100

EN388 4131X

APPLICATION

Warehouse logistics · Construction · Automotive · Agriculture · Mining · Maintenance

N1503

15 GAUGE



DESCRIPTION

- Good abrasion and tear resistance.
- Light and great flexibility.
- Good grip in dry condition and excellent durability.
- Half coating provides more protection for back and fingers.

GAUGE	15 gauge
LINER MATERIAL	Polyester
COATING MATERIAL/FINISH	Nitrile smooth
SIZE	8/M-11/XXL

Cat II · OEKO-TEX STANDARD 100

EN388 4121X



N1505

Fully coating provides more protection for back and fingers

APPLICATION

Warehouse logistics · Construction · Automotive · Agriculture · Mining · Maintenance

N1000

13 GAUGE



DESCRIPTION

- Nitrile foam with pattern design on palm provides great grip and comfort.
- 13 gauge knitted polyester with spandex mixed liner offers good comfort and dexterity.
- Customized color optional for liner and nitrile coated.
- Great abrasion level and tear resistance.

GAUGE	13 gauge
LINER MATERIAL	Polyester,Spandex
COATING MATERIAL/FINISH	Nitrile foam
SIZE	7/S -11/XXL

Cat II · OEKO-TEX STANDARD 100

EN388 4121X

APPLICATION

Warehouse logistics · Construction · Automotive · Agriculture · Mining · Maintenance

N2000

15 GAUGE



DESCRIPTION

- The 15 gauge seamless knitted nylon liner offers excellent comfort and flexibility.
- Great sensitivity for precise parts.
- Great abrasion resistance.
- Optional choice on single dipped nitrile sandy, offers great breathability and flexibility
- Optional choice on three fingers touch screen.



GAUGE	15 gauge
LINER MATERIAL	Nylon,Spandex
COATING MATERIAL/FINISH	Nitrile sandy
SIZE	7/S-11/XXL

Cat II · OEKO-TEX STANDARD 100 · TÜV SÜD

EN388 4121X

APPLICATION

Warehouse logistics · Construction · Automotive · Agriculture · Mining · Maintenance

N1501

13 GAUGE



DESCRIPTION

- Good abrasion and tear resistance.
- Light and great flexibility.
- Good grip in dry condition and excellent durability.
- Customized color optional for liner and nitrile coating.

GAUGE	13 gauge
LINER MATERIAL	Polyester
COATING MATERIAL/FINISH	Nitrile smooth
SIZE	7/S-11/XXL

Cat II · OEKO-TEX STANDARD 100 · TÜV SÜD

EN388 4121X





N1511

U3 knitted technology provides excellent grip.

APPLICATION

Warehouse logistics · Construction · Automotive · Agriculture · Mining · Maintenance

N2001

13 GAUGE



DESCRIPTION

- The nitrile sandy coating provides excellent grip, protects the hands against water and oil.
- Great abrasion resistance.
- Optional choice to use nylon and spandex liner to gain outstanding fit and hand feeling.
- Optional choice on single dipped nitrile sandy, offers great breathability and flexibility

GAUGE	13 gauge
LINER MATERIAL	Polyester
COATING MATERIAL/FINISH	Nitrile sandy
SIZE	7/S-11/XXL

Cat II · OEKO-TEX STANDARD 100 · TÜV SÜD

EN388 4121X

APPLICATION

Warehouse logistics · Construction · Automotive · Agriculture · Mining · Maintenance

N2005

15 GAUGE



DESCRIPTION

- The nitrile sandy coating provides excellent grip ,protects the hands against water and oily enviroment.
- Great abrasion resistance.
- Fully dipped nitrile sandy provides liquid repellence and enhanced grip in water and oily enviroment.
- Optional choice to use nylon material on glove liner.

GAUGE	15 gauge
LINER MATERIAL	Polyester
COATING MATERIAL/FINISH	Nitrile sandy
SIZE	7/S-11/XXL

Cat II

EN388 4121X



N2002

Half coated provides more protection on back and fingers

APPLICATION

Warehouse logistics · Construction · Automotive · Agriculture · Mining · Maintenance

N5501

15 GAUGE



DESCRIPTION

- Ultra-thin nitrile foam coating offers great dexterity and flexibility.
- The 15 gauge seamless knitted nylon offers excellent comfort and spandex liner added optional for premium quality choice.
- Great durability and breathability performance.
- Optional at nitrile dots and nitrile crotch reinforcement choice.

GAUGE	15 gauge
LINER MATERIAL	Nylon,Spandex
COATING MATERIAL/FINISH	Nitrile foam
SIZE	7/S -11/XXL

Cat II

EN388 4121X



N5503

3/4 half coating provides more protection area on finger and back.

APPLICATION

Warehouse logistics · Construction · Automotive · Agriculture · Mining · Maintenance

N2501

15 GAUGE



DESCRIPTION

- Advanced nitrile microfoam coating offers outstanding abrasion performance.
- The 15 gauge seamless knitted nylon and spandex liner offers excellent dexterity and flexibility.
- Perfect design for better fitting.
- Optional for touch screen function added(thumb,index,middle finger)
- Great durability performance.

GAUGE	15 gauge
LINER MATERIAL	Nylon, Spandex
COATING MATERIAL/FINISH	Nitrile microfoam
SIZE	6/XS-11/XXL

Cat II

EN388 4131X



N2503

Half coated provides more protection on back and fingers

APPLICATION

Warehouse logistics · Construction · Automotive · Agriculture · Mining · Maintenance

N5501D

15 GAUGE



DESCRIPTION

- Ultra-thin nitrile foam coating offers great dexterity and flexibility.
- The 15 gauge seamless knitted nylon offers excellent comfort and spandex liner added optional for premium quality choice.
- Great durability and breathability performance.
- Optional at nitrile dots and nitrile crotch reinforcement choice.

GAUGE	15 gauge
LINER MATERIAL	Nylon,Spandex
COATING MATERIAL/FINISH	Nitrile foam
SIZE	7/S-11/XXL

Cat II

EN388 4121X

APPLICATION

Warehouse logistics · Construction · Automotive · Agriculture · Mining · Maintenance

N3501

13 GAUGE



DESCRIPTION

- Nitrile foam provides great breathability and flexibility.
- 13 gauge knitted polyester liner offers good comfort and dexterity.
- Great abrasion and tear resistance.

GAUGE	13 gauge
LINER MATERIAL	Polyester
COATING MATERIAL/FINISH	Nitrile foam
SIZE	7/S-11/XXL

Cat II

EN388 4121X



N3503

3/4 half coating provides more protection area on finger and back.

APPLICATION

Warehouse logistics · Construction · Automotive · Agriculture · Mining · Maintenance

F1000

15 GAUGE

NEW PRODUCT



DESCRIPTION

- The 15G seamless knitted nylon liner offers excellent comfort and flexibility.
- Special coating material supplies safe performance for food contact.
- Advanced foam producing technology offers great breathability、flexibility and durability.

GAUGE	15 gauge
LINER MATERIAL	Nylon, Spandex
COATING MATERIAL/FINISH	Special nitrile foam
SIZE	7/S-11/XXL

Cat II

EN388 4121X

APPLICATION

Warehouse logistics · Construction · Automotive · Agriculture · Mining · Maintenance



|SURFACE RESISTANCE:
►Maintained between 10^4 Ω and 10^{11} Ω (prevents charge accumulation while avoiding conductive hazards).

|POINT-TO-POINT RESISTANCE:
►≤10^9 Ω (guarantees uniform charge dissipation in Electrostatic Protected Areas, EPAs).

|DURABILITY:
►Compliance retained after 50 standardized washing cycles.

COMPETITIVE ADVANTAGES COMPARISON

Material Type	Our Gloves	Conventional ESD Gloves
Material Type	Carbon fiber (corrosion-resistant & lightweight)	Metal fiber blend (prone to oxidation)
Material Type	Seamless PU-coated conductive fingertips	Requires external conductive patches (easily detached)
Material Type	EN 16350 + EN 388 (comprehensive protection)	EN 1149 only (anti-static)

PU1101

13 GAUGE



DESCRIPTION
- The gloves designed for light applications that require good flexibility.
- Good abrasion and tear resistance.
- Offer great sensitivity to handle small parts and precise industry.
- Customized color optional on black and grey both on liner and Pu coating.
- Nylon liner optional provides excellent abrasion resistance and comfort with EN388 performance at 4131X.

GAUGE	13 gauge
LINER MATERIAL	Polyester, Nylon
COATING MATERIAL/FINISH	Polyurethane smooth
SIZE	6/XS-11/XXL

CE Cat II UKCA OEKO-TEX STANDARD 100 TÜV SÜD

APPLICATION





PU1101-2





PU6101



PU3101

13 GAUGE



DESCRIPTION
- Ultra-light design construction provides excellent touch and feel.
- Good abrasion and tear resistance.
- Offer great sensitivity to handle small parts and precise industry.
- Customized color optional on black and grey both on liner and Pu coating.

GAUGE	18 gauge
LINER MATERIAL	Nylon
COATING MATERIAL/FINISH	Polyurethane smooth
SIZE	6/XS -11/XXL

CE Cat II UKCA OEKO-TEX STANDARD 100

APPLICATION





PU5101

13 GAUGE



DESCRIPTION
- Offer great sensitivity of small parts handling and precise industry.
- Perfect design for better fitting.



GAUGE	13 gauge
LINER MATERIAL	Polyester,Carbon fiber
COATING MATERIAL/FINISH	Polyurethane,Finger tip
	7/S-11/XXL

CE Cat II UKCA EN16350 OEKO-TEX STANDARD 100

APPLICATION





PU8101



Carbon fiber knitted in liner offers anti-statics performance.



W1002

NEW PRODUCT

10 GAUGE



DESCRIPTION

- The sandy latex finish provides the excellent grip in dry and wet condition.
- Brushed liner provides the protection on lower temperature for short contact.
- Good dexterity and flexibility in medium heavy duty work.
- Patent Adamas® technology gloves supply stable high anti-cut performance even after long time use and several times wash and dry.

GAUGE	10 gauge
LINER MATERIAL	Adamas,Acrylic terry
COATING MATERIAL/FINISH	Latex sandy
SIZE	8/M-11/XXL

CE Cat II UKCA EN407 X1XXXX FSC







APPLICATION



W1101

7 GAUGE



DESCRIPTION

- The crinkle latex finish provides the excellent grip in dry and wet condition.
- Brushed liner provides the protection on lower temperature for short contact.
- Good dexterity and flexibility in medium heavy duty work.
- Better tear and puncture resistance.

GAUGE	7 gauge
LINER MATERIAL	Acrylic terry
COATING MATERIAL/FINISH	Latex crinkle
SIZE	8/M-11/XXL

CE Cat II UKCA EN407 X2XXXX FSC





APPLICATION



W1102

7 GAUGE



DESCRIPTION

- Latex foam coating provides a superior grip in dry and wet condition.
- Thumb coated to provide more protection area.
- Brushed liner provides the protection on lower temperature for short contact.
- Great breathable on open back.

GAUGE	7 gauge
LINER MATERIAL	Acrylic terry
COATING MATERIAL/FINISH	Latex foam
SIZE	8/M-11/XXL

CE Cat II UKCA EN407 X2XXXX FSC





APPLICATION



W1212

10 GAUGE



DESCRIPTION

- Latex sandy coating provides a superior grip in dry and wet condition.
- Thumb coated to provide more protection area.
- Brushed liner provides the protection on lower temperature for short contact
- Great breathable on open back.

GAUGE	10 gauge
LINER MATERIAL	Acrylic terry
COATING MATERIAL/FINISH	Latex sandy
SIZE	8/M-11/XXL

CE Cat II UKCA EN407 X2XXXX FSC

EN388 2131X (Abrasion Resistance, Cut Resistance, Tear Resistance, Puncture Resistance, ISO Cut Level, Impact Resistance)

EN511 X2X

APPLICATION

Construction Maintenance Mining Warehouse logistics

W2024

18 GAUGE



DESCRIPTION

- Double liner designed with great dexterity, more flexible.
- Better abrasion and tear resistance.
- Offer a good grip in dry and wet condition.

GAUGE	18 gauge
LINER MATERIAL	Adamas,Polyester , Spandex,Acrylic
COATING MATERIAL/FINISH	Nitrile sandy
SIZE	8/M-11/XXL

CE Cat II UKCA EN407 X2XXXX

EN388 4X42D (Abrasion Resistance, Cut Resistance, Tear Resistance, Puncture Resistance, ISO Cut Level, Impact Resistance)

ANSI CUT A4

EN511 X2X

APPLICATION

Construction Maintenance Mining Warehouse logistics

W2004

15 GAUGE



DESCRIPTION

- Eco-Latex provides a great dexterity in lower temperature.
- Double liners provide comfort and warmth.
- Customized optional pattern and color designed on palm.

GAUGE	15 gauge outer, 10 gauge inner
LINER MATERIAL	Polyester outer, Acrylic terry liner
COATING MATERIAL/FINISH	Eco-latex
SIZE	8/M-11/XXL

CE Cat II UKCA EN407 X2XXXX FSC

EN388 2131X (Abrasion Resistance, Cut Resistance, Tear Resistance, Puncture Resistance, ISO Cut Level, Impact Resistance)

EN511 X2X

APPLICATION

Construction Maintenance Mining Warehouse logistics

W2101

15 GAUGE



DESCRIPTION

- Latex sandy coating provides a superior grip in dry and wet condition.
- Thumb coated to provide more protection area.
- Brushed liner provides the protection on lower temperature for short contact.
- Touch screen available.

GAUGE	15 gauge outer, 10 gauge inner
LINER MATERIAL	Polyester outer, Acrylic terry liner
COATING MATERIAL/FINISH	Latex sandy
SIZE	8/M-11/XXL

CE Cat II UKCA EN407 X2XXXX FSC

EN388 2131X (Abrasion Resistance, Cut Resistance, Tear Resistance, Puncture Resistance, ISO Cut Level, Impact Resistance)

EN511 X2X

APPLICATION

Construction Maintenance Mining Warehouse logistics

W2022

15 GAUGE



DESCRIPTION

- Double liner designed with great dexterity, more flexible.
- Better abrasion and tearresistance.
- Offer a good grip in dry and wet condition.
- Half coating provides more protection on back and fingers.

GAUGE	15 gauge outer, 10 gauge inner
LINER MATERIAL	Polyester outer, Acrylic terry liner
COATING MATERIAL/FINISH	Nitrile sandy
SIZE	8/M-11/XXL

CE Cat II UKCA EN407 X2XXXX

EN388 4131X (Abrasion Resistance, Cut Resistance, Tear Resistance, Puncture Resistance, ISO Cut Level, Impact Resistance)

EN511 X2X

APPLICATION

Construction Maintenance Mining Warehouse logistics

W2102

15 GAUGE



DESCRIPTION

- Double liner designed with great dexterity.
- High level of Cut performance EN ISO level C.
- Nitrile Sandy rough coating provides excellent grip performance.
- More optional on half coated or fully coated styles.
- Half coated provides more protection on back and fingers.

GAUGE	15 gauge outer, 10 gauge inner
LINER MATERIAL	Hppe, Glass fiber outer, Acrylic terry inner
COATING MATERIAL/FINISH	Nitrile sandy
SIZE	8/M-11/XXL

CE Cat II UKCA EN407 X2XXXX

EN388 4X43C (Abrasion Resistance, Cut Resistance, Tear Resistance, Puncture Resistance, ISO Cut Level, Impact Resistance)

ANSI CUT A3

EN511 X2X

APPLICATION

Construction Maintenance Mining Warehouse logistics



N1605



DESCRIPTION

- Good solution for heavy duty applications.
- Good abrasion resistance.
- Safety cuff design reduces the hand extrusion risk.
- Oil and water proof.

LINER MATERIAL	Cotton jersey
COATING MATERIAL/FINISH	N1603: Nitrile smooth half coated N1605: Nitrile smooth fully coated
SIZE	8/M-11/XXL

Cat II



APPLICATION



N1615



DESCRIPTION

- Knit wrist cuff design provides good fit and feeling.
- Good abrasion resistance.
- Oil and water proof.

LINER MATERIAL	Cotton jersey
COATING MATERIAL/FINISH	N1603:Nitrile smooth half coated N1605:Nitrile smooth fully coated
SIZE	9/L-11/XXL

Cat II



APPLICATION



N1703



DESCRIPTION

- Knit wrist cuff design provides good fit and feeling.
- Good abrasion resistance.
- Interlock liners offers great dexterity.

LINER MATERIAL	Cotton interlock
COATING MATERIAL/FINISH	N1703: Nitrile smooth half coated N1705: Nitrile smooth fully coated
SIZE	8/M-11/XXL

Cat II



APPLICATION



N3605




DESCRIPTION


- Advanced physical foam technology offers great water and oil resistance.
- Brushed jersey liner safety cuff design reduces the hand extrusion risk.
- Good abrasion resistance.

LINER MATERIAL	Cotton jersey
COATING MATERIAL/FINISH	Nitrile foam
SIZE	8/M-11/XXL

CE Cat II UKCA EN407 X1XXXX



APPLICATION



N5005




DESCRIPTION

- Premium quality on the nitrile dipped to offer great performance on chemical resistance and abrasion resistance.
- Great grip and durability.
- Fully dipped to provide better protection.
- Different dipped grams are selected available for special demands.

LINER MATERIAL	Cotton jersey
COATING MATERIAL/FINISH	N5003:Nitrile smooth half coated N5005:Nitrile smooth fully coated
SIZE	9/L-11/XXL

CE Cat II UKCA EN407 X1XXXX



APPLICATION



N6005




DESCRIPTION

- Premium quality on the nitrile dipped to offer great performance on chemical resistance and abrasion resistance.
- Great grip and durability.
- Fully dipped to provide better protection.
- Thicker and heavy dipped grams are selected available for special demands.

LINER MATERIAL	Cotton jersey
COATING MATERIAL/FINISH	N6003:Nitrile smooth half coated N6005:Nitrile smooth fully coated
SIZE	9/L-11/XXL

CE Cat II UKCA EN407 X1XXXX



APPLICATION



L1703



DESCRIPTION

- The crinkle latex finish provides the excellent grip in dry and wet condition.
- Brushed jersey liner provides the protection on lower temperature for short contact.
- Good dexterity and flexibility in medium heavy duty work.
- Strip gloves easily according to the safety cuff design.

LINER MATERIAL	Cotton jersey
COATING MATERIAL/FINISH	L1703:Latex crinkle half coated L1705: Latex crinkle fully coated
SIZE	8/M-11/XXL

CE Cat II UKCA EN407 X2XXXX FSC



APPLICATION



L1713



DESCRIPTION


- Brushed liner provides the protection on slight lower temperature for short contact.
- Good dexterity and flexibility in medium heavy duty work.
- Knit wrist cuff design provides the great fit.

LINER MATERIAL	Cotton jersey
COATING MATERIAL/FINISH	L1713:Latex crinkle half coated L1715:Latex crinkle fully coated
SIZE	8/M-11/XXL

CE Cat II UKCA EN407 X2XXXX FSC



APPLICATION



L1903



DESCRIPTION

- Cotton liner designed to great dexterity, more flexible.
- Offer a good grip in dry and wet condition.
- Half coated provides more protection on back and fingers.

LINER MATERIAL	Cotton interlock
COATING MATERIAL/FINISH	Latex crinkle
SIZE	8/M-11/XXL

CE Cat II UKCA EN407 X2XXXX FSC



APPLICATION



CHEMICAL RESISTANCE GLOVES

CHEMICAL RESISTANCE GLOVES SERIES



Coating layer:
Patterns embedded in the glove provides high-performance grip for tasks in slippery environments as well as a chemicals protection.

lining:
A cotton textile liner offers higher comfort and thermal insulation,making it very comfortable to wear for a long period of time.

Additional attributes:
Nitrile coating providing a protection against a wide range of chemicals such as alcohols, hydrocarbons, oils& greases.
High performance grip reducing hand fatigue , improving productivity, and enhancing safety.
High comfort and thermal insulation, making this glove easy to wear for a long period of time.

CM1000




DESCRIPTION


- Advanced chemical protection against acid including nitric acid, ammonium hydroxide,sulphuric.
- Acid and sodium hydroxide, hydrogen peroxide, n-heptane, formaldehyde solution.
- Anti-slip design provides the great grip and better feeling in wet and dry condition.
- Easy to don and remove with safety cuff design and long length to provide more area protection.
- Latex free to avoid any allergy .

CONSTRUCTION	Cut and sewn
LINER MATERIAL	Cotton Interlock
COATING MATERIAL/FINISH	Nitrile granular
CUFF STYLE	Pinked
SIZE	7/S -11/XXL

CE UK CA Cat III







APPLICATION



CM2000




DESCRIPTION


- Excellent resistance to many chemical solvents.
- Special hand former design to reduce hand fatigue and improve the productive.
- Latex granular provides the great grip in both wet and dry condition.
- Easy to don and remove with safety cuff design and Max.42cm total length to provide more area protection.
- Latex formulation offer great oil protection and abrasion resistance

CONSTRUCTION	Cut and sewn
LINER MATERIAL	Cotton Interlock
COATING MATERIAL/FINISH	Latex crinkle
CUFF STYLE	Pinked
SIZE	7/S -11/XXL

CE UK CA Cat III







APPLICATION



CM3000




DESCRIPTION


- Special hand former design to reduce hand fatigue and improve the productive.
- Brominated butyl rubber granular provide the great grip in both wet and dry condition.
- Easy to don and remove with safety cuff design and Max.42cm total length to providemore area protection.
- Great online leak testing control in process to ensure the good tightness.
- Good dexterity and pliability at low temperature.

CONSTRUCTION	Cut and sewn
LINER MATERIAL	Cotton Interlock
COATING MATERIAL/FINISH	Brominated butyl rubber
CUFF STYLE	Pinked
SIZE	7/S -11/XXL

CE UK CA Cat III







APPLICATION



N7500



DESCRIPTION

- Advanced chemical protection against acid including nitric acid, acetic acid, sulphuric acid and sodium hydroxide.
- Easy to don and remove with safety cuff design and Max.42cm total length to provide more area protection.
- Cotton interlock liner offering superior comfort.
- Great online leak testing control in process to ensure the tightness.

CONSTRUCTION	Cut and sewn
LINER MATERIAL	Cotton Interlock
COATING MATERIAL/FINISH	Neoprene smooth
CUFF STYLE	Pinked
SIZE	7/S -11/XXL

CE Cat III UKCA



APPLICATION



N7100




DESCRIPTION

- Excellent resistance to many chemical solvents and oil-based chemicals.
- Special hand former design to reduce hand fatigue and improve the productive.
- Nitrile granular provides the great grip in both wet and dry condition.
- Easy to don and remove with safety cuff design and Max.42cm total length to provide more area protection.
- Nitrile formulation offers great oil protection and abrasion resistance

CONSTRUCTION	Cut and sewn
LINER MATERIAL	Cotton Interlock
COATING MATERIAL/FINISH	Nitrile granular
CUFF STYLE	Pinked
SIZE	7/S -11/XXL

CE Cat II UKCA



APPLICATION



L7100



DESCRIPTION

- Special hand former design to reduce hand fatigue and improve the productive.
- Latex granular provide the great grip in both wet and dry condition.
- Easy to don and remove with safety cuff design and Max.42cm total length to provide more area protection.
- Great online leak testing control in process to ensure the good tightness.
- Good dexterity and pliability at low temperature.

CONSTRUCTION	Cut and sewn
LINER MATERIAL	Cotton Interlock
COATING MATERIAL/FINISH	Latex granular
CUFF STYLE	Pinked
SIZE	7/S -11/XXL

CE Cat II UKCA EN407 X2XXXX





APPLICATION



N1555




DESCRIPTION

- Advanced chemical protection against acid including nitric acid, ammonium hydroxide,sulphuric, acid and sodium hydroxide, hydrogen peroxide, n-heptane, formaldehyde solution.
- Anti-slip design provides the great grip and better feeling in wet and dry condition.
- Easy to don and remove with safety cuff design and long length to provide more area protection.
- Latex free to avoid any allergy .

CONSTRUCTION	Flocked
COATING MATERIAL/FINISH	Nitrile
CUFF STYLE	Gauntlet
SIZE	7/S -11/XXL

CE Cat III UKCA



APPLICATION



UNDERSTANDING THE EN374 STANDARD: PROTECTION AGAINST CHEMICALS AND MICROORGANISMS

The EN374 standard is a critical European norm defining the performance requirements for gloves designed to protect users against chemicals and biological hazards. Here's a breakdown of its key components and how it ensures safety

What Does EN374 Cover?

The standard is divided into three parts, each addressing specific risks:
EN374-2: Assesses resistance to penetration by chemicals and microorganisms, ensuring gloves are free of defects like pinholes.
EN16523(EN374-3): Measures resistance to chemical permeation (penetration of chemicals through the glove material).
EN374-4: Evaluates degradation resistance (physical changes in the glove material caused by chemicals).
EN374-5: Focuses on protection against microorganisms (e.g., bacteria, fungi, viruses).

How Are Gloves Tested?

To meet EN374, gloves undergo rigorous laboratory testing:
Chemical Permeation Test:
A glove sample is exposed to a chemical, and the time taken for the chemical to permeate through the material is recorded (measured as "breakthrough time").
Certification requires a minimum breakthrough time of 30 minutes for listed chemicals.
Microbial Penetration Test:
Gloves are tested against a bacteriophage (virus-like particles) to ensure no leakage occurs under pressurized conditions.
Degradation Assessment:
Materials are checked for swelling, hardening, or softening after chemical exposure

EN374 Certification Levels

Gloves are classified based on their performance:
Type A: Resists ≥6 chemicals (breakthrough time ≥30 minutes).
Type B: Resists ≥3 chemicals.
Type C: Resists ≥1 chemical.
Note: Only gloves meeting Type A/B/C criteria can display the "chemical beaker" pictogram.

Why Does Testing Matter?

Accurate EN374 compliance ensures:
Worker Safety: Prevents skin exposure to hazardous substances.
Informed Selection: Helps users match gloves to specific chemical risks.
Regulatory Compliance: Meets EU PPE Regulation 2016/425 for workplace safety.



KNOWLEDGE EMPOWERS SAFETY.
CHOOSE WITH CONFIDENCE.

HOUSEHOLD GLOVES

HOUSEHOLD GLOVES SERIES



OIL PROOF · FOOD-SAFE · HYPOALLERGENIC

CLEAN DISHES SAFELY, RINSE GREASE EASILY

| INDUSTRIAL-GRADE DURABILITY:
- ▸ EN388 Certified | Tear Resistance 6.8N · Puncture Resistance 67N
- ▸ **Nitrile Content >30%** | High acrylonitrile formula, 60% stronger oil & corrosion resistance

| FOOD-SAFE CERTIFIED:
- ▸ **FDA-certified for direct food contact** | Safe for raw meat, veggies, and baby utensils – **zero chemical residue**.

| HYPOALLERGENIC PROTECTION:
- ▸ **Latex Protein-Free** | Medical-grade allergy-safe design, ideal for sensitive skin, moms, and babies

| FLEXIBLE & SLIP/PUNCTURE-RESISTANT:
- ▸ **3D Ergonomic Fit + Reinforced Fingertips** | Firm grip in greasy conditions, withstands fish bones and sharp shells.

WORKS FOR: Washing dishes, bathroom cleaning, baking, pet care

DIAMOND-GRIP ANTI-SLIP

SCRATCH-RESISTANT

PUNCTURE-RESISTANT

OIL-RESISTANT EASY TO CLEAN

L1802



DESCRIPTION
- Supreme nature latex offers excellent feeling flexibility and duration.
- Diamond pattern offers good grip in wet condition.
- Intelligent production line can wash fully, gloves more clean and safe.
- Options for different color design.
- Moisture absorption and sweat releasing with flocked inner.

CONSTRUCTION	Flocked
COATING MATERIAL/FINISH	Latex
CUFF STYLE	Gauntlet
SIZE	7/S-10/XL
LENGTH	330mm

CE Cat I FSC

APPLICATION



L1804



DESCRIPTION
- Supreme nature latex offers excellent feeling flexibility and duration.
- Diamond pattern offers good grip in wet condition.
- Intelligent production line can wash fully, gloves more clean and safe.
- Easy to don and remove and long length to provide more area protection.
- Cotton flocking, cool and sweat-absorbent, food contact.

CONSTRUCTION	Flocked
COATING MATERIAL/FINISH	Latex
CUFF STYLE	Gauntlet
SIZE	7/S-10/XL
LENGTH	330mm

CE Cat I FSC

APPLICATION



N1801



DESCRIPTION
- Anti-slip design provides the great grip and better feeling in wet and dry condition.
- Easy to don and remove with safety cuff design and long length to provide more area protection.
- Latex free to avoid any allergy.
- Light assembly in chemical environments.
- Chemical resistance glove with industry leading grip and high flexibility.

CONSTRUCTION	Unflocked
COATING MATERIAL/FINISH	Nitrile
CUFF STYLE	Gauntlet
SIZE	7/S-10/XL
LENGTH	330mm

CE Cat I







APPLICATION



DISPOSABLE NITRILE GLOVES

DISPOSABLE NITRILE GLOVES SERIES



DIAMOND PATTERN NITRILE GLOVES | DEFY GREASE, MOVE FREELY

DIAMOND GRIP X3000: LAB-GRADE PROTECTION, INDUSTRIAL DURABILITY

| WHY DO PROFESSIONALS CHOOSE NITRILE?

- **Oil & Chemical Resistance:**
  Blocks oils, solvents, and acidic liquids—no leaks or stains.
- **Puncture Resistance & Flexibility:**
  Dense nitrile structure resists sharp objects, stays soft for precise touch.
- **Hypoallergenic & Safe:**
  No latex allergy risks, meets medical-grade standards.

| SMART DESIGN FOR DEMANDING WORK:

- **Full Diamond Texture:**
  50% stronger grip in wet/oily conditions—control tools and small parts securely.
- **Soft Nitrile Formula:**
  3D-molded to fit hand curves, comfortable for long hours.
- **Beaded Cuff + Polymer Lining:**
  Anti-slip design, 30% faster to wear, no powder to dirty equipment.

D5000



APPLICATION



DESCRIPTION

- Advanced chemical protection against acid including nitric acid, ammonium hydroxide,sulphuric.
- Acid and sodium hydroxide, hydrogen peroxide, n-heptane, formaldehyde solution.
- Anti-slip design provides the great grip and better feeling in wet and dry condition.
- Easy to don and remove with safety cuff design and long length to provide more area protection.
- Latex free to avoid any allergy .

Type	Powder-free,Non-sterile
Material	Nitrile
Texture	Fingertip
SIZE	XS-2XL
FINGER THICKNESS	0.11mm/4.3mil
PALM THICKNESS	0.06mm/2.4mil

CE FENTANYL TESTED





Colour:

Weight (grams):
3.0 □ 3.5 □ 4.5 □ 5.5 □ 7.0 □
8.0 □ 8.5 □

X3000



APPLICATION




DESCRIPTION

- Advanced chemical protection against acid including nitric acid, ammonium hydroxide,sulphuric.
- Acid and sodium hydroxide, hydrogen peroxide, n-heptane, formaldehyde solution.
- Anti-slip design provides the great grip and better feeling in wet and dry condition.
- Easy to don and remove with safety cuff design and long length to provide more area protection.
- Latex free to avoid any allergy .

Type	Powder-free,Non-sterile
Material	Nitrile
Texture	Diamond Texture
SIZE	S-2XL
FINGER THICKNESS	0.25mm/9.8mil
PALM THICKNESS	0.22mm/8.7mil

CE





Colour:

Weight (grams):
8.0 □

D2000



APPLICATION




DESCRIPTION

- Advanced chemical protection against acid including nitric acid, ammonium hydroxide,sulphuric.
- Acid and sodium hydroxide, hydrogen peroxide, n-heptane, formaldehyde solution.
- Anti-slip design provides the great grip and better feeling in wet and dry condition.
- Easy to don and remove with safety cuff design and long length to provide more area protection.
- Latex free to avoid any allergy .

Type	Powder-free,Non-sterile
Material	Nitrile
Texture	Fingertip
SIZE	S-XL
FINGER THICKNESS	0.16mm/6.3mil
PALM THICKNESS	0.12mm/4.7mil

CE






Colour:

Weight (grams):
6.0 □ 11.0 □

Garden Gloves Series

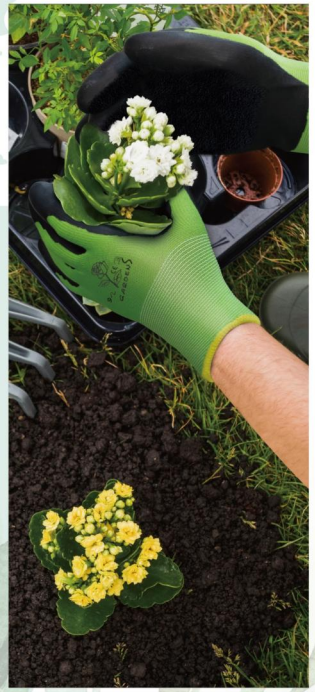

ECO-LATEX SERIES

GAUGE	15 gauge
LINER MATERIAL	Polyester, spandex
COATING MATERIAL/FINISH	Eco-Latex
SIZE	6/XS - 11/XXL

DESCRIPTION

- Polyester and spandex knitted liner to provide great flexibility and comfort.
- Eco-Latex technology coating offers the outstanding durability performance.
- Customized pattern designed available.

APPLICATION

Automotive industry, warehousing, transportation,building and construction, industry and agriculture, garden working



More options...





LATEX-SANDY SERIES

GAUGE	13 gauge
LINER MATERIAL	Polyester
COATING MATERIAL/FINISH	Latex sandy
SIZE	6/XS - 11/XXL

DESCRIPTION

- Customized pattern designed available for liner and coating color.
- Latex sandy provides great breathability and comfort.
- High flexibility polyester with latex sandy offers excellent flexibility to reduce fatigue.

APPLICATION

Automotive industry, warehousing, transportation,building and construction,agriculture, garden working



More options...



Kids Gloves

KIDS GLOVES SERIES



CUT-RESISTANT GLOVES FOR KIDS
SAFE EXPLORATION, NATURAL GROWTH

DESIGNED FOR 3-12-YEAR-OLDS' OUTDOOR ADVENTURES, EU SAFETY CERTIFIED, BALANCING PROTECTION AND COMFORT.

|ULTIMATE PROTECTION:
▸ EN 388 certified cut resistance. Latex non-slip textured surface, chemical-free and odorless.

|SOFT & BREATHABLE:
▸ Baby-friendly inner lining, stretchy fabric fits tiny hands. 200+ air holes keep hands cool and dry.

|DURABLE & EASY CARE:
▸ Machine-washable 50+ times without damage. Works for climbing, biking, tree adventures – grows with your child.

|SMART DESIGN:
▸ 3D curved thumb shape, fits kids' hands naturally for flexible movement.

PERFECT FOR: Outdoor play, nature discovery, cycling, climbing.



9 ~ 12 YEARS
SIZE: 2XS (9 years- 12 years)



9 ~ 12 YEARS
SIZE: 2XS (9 years- 12 years)



6 ~ 8 YEARS
SIZE: 3XS (6 years- 8 years)



6 ~ 8 YEARS
SIZE: 3XS (6 years- 8 years)



3 ~ 5 YEARS
SIZE: 4XS (3 years- 5 years)



3 ~ 5 YEARS
SIZE: 4XS (3 years- 5 years)

GAUGE	15 gauge
LINER MATERIAL	Polyester, spandex
COATING MATERIAL/FINISH	Latex sandy
SIZE	4XS-XS (3 years- 12 years)

DESCRIPTION

- The kid gloves are suitable for children aged 3-12 years old. with colorful and skin friendly material.
- The natural latex coating provides the maximum comfort and hand protection with great grip.
- The spandex knitted inside fits the hand very well and suitable for sensitive work such like small part handling.







